

2022 US Heat Catalog



CADET  **XC Dimplex**[®] **CONVECTAIR**

 BRANDS OF GLEN DIMPLEX AMERICAS

Table of Contents

Fan-forced Heaters	1
Apex72®	2
Com-Pak®	3-4
Com-Pak® Bath	5
Com-Pak® Max	6
Com-Pak® Twin	7
Energy Plus®	8
Register®	9
RBF	10
RFI Series	11
Baseboards	12
F Series Electric Baseboard.....	13
Portable Baseboard.....	14
SoftHeat® Hydronic	15
SoftHeat® Portable Hydronic	16
Linear Convactor Baseboards.....	17
Proportional Convactor Baseboards.....	18
Panel Convectors	19
Allegro II Series.....	20
Apero Series.....	21
Specialty	22
Under Cabinet Heater	23
Pump House Heater.....	24
Cove Heater	25
Ceiling-mounted Heater	26
Industrial Unit Heater	27
Garage/Workshop Heater	28
Construction/Unit Heaters	29
Thermostats	30-31
Outdoor Heat	32
DLW Series	33
DIR Series.....	34
DIRP Series.....	35
DSH Series.....	36
DGR Series	37
Ordering SKU Index	38-41

Fan-forced Heaters



Find the right fit for you. Fan-forced heaters are great heating solutions for residential and commercial areas including laundry rooms, vestibules, bathrooms, and even large foyers. Although all electric heat is 100% efficient, you will see some energy savings with a fan-forced heater because it takes very little time to heat a room. Fan-forced heaters circulate the air throughout the room which results in the space warming much quicker than with other room heaters. For versatility and efficiency, choose fan-forced heat.

High Installation

Warm your room and gain living space—ideal for homes with kids and pets, installs 72 inches above the floor

Contemporary Look

Modern style decorative cover blends into any room

Low Maintenance

Clean only once every 24 months, compared to six months with most wall heaters



Product Dimensions (WxHxD)
12" x 8-1/2" x 4"
30.5 cm x 21.6 cm x 10.2 cm



Apex72 kits include all components shown above and an electronic wall thermostat.
For electronic thermostats sold separately, see page 30

Complete Kits (include wall can, orient ring, ACL cover and electronic thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
HWC101K	1000	120	8.3	3415	4.6 / 10.1
HWC102K	1000	240	4.2	3415	4.6 / 10.1

Heater Assemblies (require wall can, decorative cover and electronic thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
HW051	500	120	4.2	1710	4.7 / 2.1
HW101	1000	120	8.3	3415	4.7 / 2.1
HW151	1500	120	12.5	5120	4.7 / 2.1
HW052	500	240	2.1	1710	4.7 / 2.1
HW082	800	240	3.3	2730	4.7 / 2.1
HW102	1000	240	4.2	3415	4.7 / 2.1
HW132	1300	240	5.4	4440	4.7 / 2.1
HW038	375	208	1.8	1280	4.7 / 2.1
HW058	525	208	2.5	1795	4.7 / 2.1
HW078	750	208	3.6	2560	4.7 / 2.1
HW108	1000	208	4.8	3415	4.7 / 2.1
HW128	1200	208	5.8	4095	4.7 / 2.1
HW168	1600	208	7.7	5460	4.7 / 2.1
HW162	1600 / 1200	240 / 208	6.7 / 5.7	5460 / 4095	4.7 / 2.1

Accessories (sold separately)

Model	Description
CC / CC10	Galvanized wall can, single or 10-pack
CCSMW / CCSMB	Surface mount wall can, white or black
ACL / ACL5	Decorative cover with louver outlet grille, single or 5-pack
ACH / ACH5	Decorative cover with hexagonal outlet grille, single or 5-pack
OR / OR10	Orient ring, single or 10-pack

Com-Pak® Series

Fan-forced Heaters

Get warm on your terms with this top selling wall heater. The Com-Pak is an efficient and affordable way to add warmth without installing new ductwork. With multiple installation options and proven safety features, your family can enjoy safe, sensible warmth for years.



Product Dimensions (WxHxD)
9" x 12" x 4"
22.9 cm x 30.5 cm x 10.2 cm



Complete Units (include wall can and white grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CSC101TW	1000	120	8.3	3415	7 / 3.2
CSC151TW	1500	120	12.5	5120	7 / 3.2
CSC102TW	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	7 / 3.2
CSC152TW	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	7 / 3.2
CSC202TW	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	7 / 3.2
CSC101W*	1000	120	8.3	3415	7 / 3.2
CSC151W*	1500	120	12.5	5120	7 / 3.2
CSC072W*	750 / 563	240 / 208	3.1 / 2.7	6825 / 5120	7 / 3.2
CSC102W*	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	7 / 3.2
CSC122W*	1250 / 937	240 / 208	5.2 / 4.5	4265 / 3200	7 / 3.2
CSC152W*	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	7 / 3.2
CSC202W*	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	7 / 3.2

*Requires a wall or built-in thermostat

See next page for heater assemblies and accessories

Com-Pak® Series

Fan-forced Heaters

Quiet, Fast & Efficient

Warm up in a hurry with a fast-heating element as the centrifugal fan provides, quiet, efficient airflow

Barely Noticeable

Unique compact design is recess mounted to suit any room and available with or without a built-in thermostat

Quality

Metal grilles are powder-coated paint; the galvanized wall can is corrosion-resistant and fits the entire Com-Pak family of products



Heater Assemblies (require wall can, grille and thermostat)

Model*	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CS051	500	120	4.2	1719	3.5 / 1.5
CS101	1000	120	8.3	3415	3.5 / 1.5
CS151	1500	120	12.5	5120	3.5 / 1.5
CS058	563	208	2.7	1925	3.5 / 1.5
CS078	750	208	3.6	2560	3.5 / 1.5
CS108	1000	208	4.8	3415	3.5 / 1.5
CS118	1125	208	5.4	3840	3.5 / 1.5
CS158	1500	208	7.2	5120	3.5 / 1.5
CS208	2000	208	9.6	6825	3.5 / 1.5
CS052	500 / 375	240 / 208	2.1 / 1.8	1710 / 1280	3.5 / 1.5
CS072	750 / 563	240 / 208	3.1 / 2.7	2560 / 1925	3.5 / 1.5
CS102	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	3.5 / 1.5
CS122	1250 / 937	240 / 208	5.2 / 4.5	4265 / 3200	3.5 / 1.5
CS152	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	3.5 / 1.5
CS202	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	3.5 / 1.5

*Add suffix T to model to add a built-in thermostat

Accessories (sold separately)

Model	Description
CTT1W CTT1A	Single pole built-in thermostat kit, white Single pole built-in thermostat kit, almond
CTT2W CTT2A	Double pole built-in thermostat kit, white Double pole built-in thermostat kit, almond
CTT1P CTT2P	Single pole built-in tamperproof thermostat kit Double pole built-in tamperproof thermostat kit
CTT1W CTT2W	Single pole built-in thermostat kit, white (retail pack) Double pole built-in thermostat kit, white (retail pack)
CC CC10	Galvanized wall can, single Galvanized wall can, 10-pack
CCSMB CCSMW CCSMA	Surface mount wall can, black Surface mount wall can, white Surface mount wall can, almond
CGW/CGW10	Vertical grille kit, white, single or 10-pack
CGA/CGA10	Vertical grille kit, almond, single or 10-pack
CGB/CGB10	Vertical grille kit, black, single or 10-pack
CMGW CMGW5	Horizontal grille kit, white, single Horizontal grille kit, white, 5-pack
CMGA CMGA5	Horizontal grille kit, almond, single Horizontal grille kit, almond, 5-pack
CAMW CAMA	Adapter plate, 18-1/2" W x 22" H, white Adapter plate, 18-1/2" W x 22" H, almond
SAMW SAMA	Adapter plate, 12" W x 21-1/4" H, white Adapter plate, 12" W x 21-1/4" H, almond
C1TKW	1" Trim Ring kit
C4TKW	4" Surface Trim kit
KNOB CS/CST	Replacement Single Pole Knob Kit, White (retail pack, order in multiples of 6)

Thermostat & Timer

An integrated thermostat and timer allow you to stay in control of your temperature at all times

No More Cold Feet

Goodbye chilly mornings, hello Com-Pak Bath—get instant heat where and when you need it the most

Instant Heat Boost

Set the auto-timer for 20, 40 or 60 minutes to get that instant heat, then after the timer runs out control returns to the thermostat setting



Product Dimensions (WxHxD)
9" x 12" x 4"
22.9 cm x 30.5 cm x 10.2 cm



Complete Units (include wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CBC103TW	1000	120 / 240	8.3 / 4.2	3415	8 / 3.6
CBC132TW	500 / 800 / 1300 375 / 600 / 975	240 208	2.1 / 3.3 / 5.4 1.8 / 2.9 / 4.5	1710 / 2730 / 4440 1280 / 2050 / 3200	8 / 3.6

Heater Assemblies (require wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CB103TW	1000	120 / 240	8.3 / 4.2	3415	4.7 / 2.1
CB132TW	500 / 800 / 1300 375 / 600 / 975	240 208	2.1 / 3.3 / 5.4 1.8 / 2.9 / 4.5	1710 / 2730 / 4440 1280 / 2050 / 3200	4.7 / 2.1

Accessories (sold separately)

Model	Description
CC CC10	Galvanized wall can, single Galvanized wall can, 10-pack
CBGW CBGW5	Grille kit, white, single Grille kit, white, 5-pack
C1TKW	1" Trim Ring kit
C4TKW	4" Surface Trim kit
CAMW	Adapter plate, 18-1/2" W x 22" H, white
SAMW	Adapter plate, 12" W x 21-1/4" H, white

Com-Pak® Max Series

Fan-forced Heaters

Upgraded

Every component of this heater, including its corrosion-resistant, coated element, is designed to last so you can enjoy years of reliable heat

Flexibility

An excellent choice for any room, units with thermostats use vertical grilles, units without thermostats use horizontal or vertical grilles

Convenient

Choose your wattage at installation, with heaters having three to five different wattages available there's no need to get multiple models



Horizontal Installation
Product Dimensions (WxHxD)
12" x 9" x 4"
30.5 cm x 22.9 cm x 10.2 cm



Vertical Installation
Product Dimensions (WxHxD)
9" x 12" x 4"
22.9 cm x 30.5 cm x 10.2 cm

Heater Assemblies (require wall can and grille, may require a thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CM158*	700 / 800 / 1500	208	3.4 / 3.8 / 7.2	2390 / 2730 / 5120	5 / 2.3
CM198* / CM198T	400 / 700 / 1100 / 1500 / 1900	208	1.9 / 3.4 / 5.3 / 7.2 / 9.1	1710 / 2730 / 4095 / 5120 / 6825	4.8 / 2.2 / 5 / 2.3
CM152* / CM152T	700 / 800 / 1500 / 525 / 600 / 1125	240 / 208	2.9 / 3.3 / 6.3 / 2.5 / 2.9 / 5.4	2390 / 2730 / 5120 / 1790 / 2045 / 3840	4.8 / 2.2 / 5 / 2.3
CM192* / CM192T	400 / 700 / 1100 / 1500 / 1900 / 300 / 525 / 825 / 1125 / 1425	240 / 208	1.7 / 2.9 / 4.6 / 6.3 / 7.9 / 1.4 / 2.5 / 4.0 / 5.4 / 6.9	1365 / 2390 / 36755 / 5120 / 6485 / 1025 / 1790 / 2815 / 3840 / 4860	4.8 / 2.3 / 5 / 2.3

*Requires a wall or built-in thermostat

Accessories (sold separately)

Model	Description
CC / CC10	Galvanized wall can - single / 10-pack
CCSMB / CCSMW / CCSMA	Surface mount wall can - black / white / almond
CGW / CGW10 CGA / CGA10 CGB / CGB10	Vertical grille kit, white - single / 10 pack Vertical grille kit, almond - single / 10 pack Vertical grille kit, black - single / 10 pack
CMGW / CMGW5 CMGA / CMGA5	Horizontal grille kit, white - single / 5 pack Horizontal grille kit, almond - single / 5 pack
CTT1W / CTT1A	Built-in thermostat kit, single pole, white / almond
CTT2W / CTT2A	Built-in thermostat kit, double pole, white / almond
CTT1P / CTT2P	Built-in tamperproof thermostat kit (no knob), single / double pole
CAMW / CAMA	Adapter plate, 18-1/2" W x 22" H, white / almond
SAMW / SAMA	Adapter plate, 12" W x 21-1/4" H, white / almond

Heater assemblies do not come with a wall can or grille kit, and may require a thermostat

Com-Pak[®] Twin Series

Fan-forced Heaters

Heat Larger Spaces

Up to 450 square feet—plenty of warmth for family rooms or living rooms

Two in One

Warms quickly with two fast-heating coil elements and two efficient fans

High Output

Side by side heaters behind a single grille quickly eliminate drafts and cold spots in your open areas like foyers and entryways too



Product Dimensions (WxHxD)
16-1/4" x 12" x 4"
41.3 cm x 30.5 cm x 10.2 cm



Complete Units (include wall can and white grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CSTC302W*	3000 / 2250	240 / 208	12.5 / 10.8	10240 / 7680	11 / 5.4
CSTC302TW	3000 / 2250	240 / 208	12.5 / 10.8	10240 / 7680	12 / 5.4
CSTC402W*	4000 / 3000	240 / 208	16.7 / 14.4	13650 / 10240	12 / 5.4
CSTC402TW	4000 / 3000	240 / 208	16.7 / 14.4	13650 / 10240	12 / 5.4

Heater Assemblies (require wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CST308*	3000	208	14.4	10240	6.5 / 2.9
CST308T	3000	208	14.4	10240	7 / 3.2
CST408*	4000	208	19.2	13650	6.5 / 2.9
CST408T	4000	208	19.2	13650	7 / 3.2
CST302*	3000 / 2250	240 / 208	12.5 / 10.8	10240 / 7680	6.5 / 2.9
CST302T	3000 / 2250	240 / 208	12.5 / 10.8	10240 / 7680	7 / 3.2
CST402*	4000 / 3000	240 / 208	16.7 / 14.4	13650 / 10240	6.5 / 2.9
CST402T	4000 / 3000	240 / 208	16.7 / 14.4	13650 / 10240	6.5 / 2.9

*Requires a wall or built-in thermostat

Accessories (sold separately)

Model	Description
CTGW / CTGA	Single grille, white / almond
CTC	Wall can, single
CTAMW / CTAMA	Adapter plate, 18-1/2" W x 22" H - white / almond
CTS4W / CTS4A	4" surface mount adapter - white / almond
CTT1W / CTT1A	Built-in thermostat kit, single pole - white / almond
CTT2W / CTT2A	Built-in thermostat kit, double pole - white / almond
CTT1P / CTT2P	Built-in tamperproof thermostat kit, single or double pole

Intelligent Control

An integrated, electronic digital thermostat allows you to stay in control of your temperature at all times and reduces up to 30% on your heating bill

Ultra Quiet Operation

Auto adjusting, variable speed fan delivers the quietest most comfortable, consistent temperature

Mistake Proof Install

With the built-in smart sensor you can easily update old heaters and not worry about damaging your new heater, or whether you have 120, 208 or 240 Volts



Product Dimensions (WxHxD)
9" x 12" x 4"
22.9 cm x 30.5 cm x 10.2 cm



Complete Unit (includes wall can, white grille and built-in electronic thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CEC163TW	1000 / 1600 / 1500	120 / 240 / 208	8.3 / 6.7 / 7.2	3415 / 5460 / 5120	8.1 / 3.6

Heater Assembly (requires wall can and grille)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
CE163T	1000 / 1600 / 1500	120 / 240 / 208	8.3 / 6.7 / 7.2	3415 / 5460 / 5120	4.4 / 2.0

Accessories (sold separately)

Model	Description
CC	Galvanized wall can, single
CC10	Galvanized wall can, 10-pack
CCSMW	Surface mount wall can, white
CCSMB	Surface mount wall can, black
CEGW	Grille kit, white
CEGB	Grille kit, black
CAMW	Adapter plate, 18-1/2" W x 22" H, white
SAMW	Adapter plate, 12" W x 21-1/4" H, white

Powerful Operation

Enjoy complete warmth, thanks to a powerful air fan

Simple Installation

Pre-formed, bendable legs and single screw fastening make mounting and installation easy

Versatile

Multi-watt models let you choose the best setting for your application, and wall or built-in thermostat options give you opportunities for customized control



Product Dimensions (WxHxD)
14" x 7-3/8" x 4"
35.6 cm x 18.7 cm x 10.2 cm



Complete Units (include wall can and white grille, require thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
RMC151W	500 / 1000 / 1500	120	4.2 / 8.3 / 12.5	1710 / 3415 / 5120	9 / 4.1
RMC208W	2000	208	9.6	6825	9 / 4.1
RMC162W	700 / 900 / 1600 525 / 675 / 1200	240 208	2.9 / 3.8 / 6.7 2.5 / 3.3 / 5.8	2390 / 3075 / 5460 1795 / 2305 / 4095	9 / 4.1
RMC202W	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	9 / 4.1

Heater Assemblies (require wall can, grille and thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
RM151	500 / 1000 / 1500	120	4.2 / 8.3 / 12.5	1710 / 3415 / 5460	4.5 / 2
RM108	1000	208	4.8	3415	4.5 / 2
RM158	1500	208	7.2	5120	4.5 / 2
RM168	700 / 900 / 1600	208	3.4 / 4.3 / 7.7	2390 / 3175 / 5460	4.5 / 2
RM208	2000	208	9.6	6825	4.5 / 2
RM102	1000 / 750	240	4.2 / 3.6	3415 / 2560	4.5 / 2
RM162	700 / 900 / 1600 525 / 675 / 1200	240 208	2.9 / 3.8 / 6.7 2.5 / 3.3 / 5.8	2390 / 3075 / 5460 1795 / 2305 / 4095	4.5 / 2
RM202	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	4.5 / 2
RM222	2250 / 1687	240 / 208	9.4 / 8.1	7680 / 5760	4.5 / 2

Accessories (sold separately)

Model	Description
RMGW / RMGA	Grille kit, white, single, white or almond
RMGW5 / RMGA5	Grille kit, white, 5-pack, white or almond
RMC / RMC5	Wall can, single or 5-pack
RMT2W / RMT2A	Double pole thermostat kit, white or almond

RBF

Fan-forced Heaters

Stylish Functionality

Stainless steel grille with stylish mesh screen is designed to provide even, gentle warmth throughout your space

Compact Design

Compact design and distinctive grille blends well with existing hardware and plumbing fixtures in most bathrooms

Simple Operation

A super simple, convenient on/off switch leaves nothing to think about on a chilly morning when all you want is to turn your bathroom into a cozy oasis



Heater Assembly & Grille (wall can required)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
RBF101	1000	120	12.5	3415	8 / 3.6

Accessories (sold separately)

Model	Description
RBFC	Wall can



Wall can required for new installation.

Product Dimensions (WxHxD)
 10-1/4" x 16-3/4" x 4"
 26.0 cm x 42.5 cm x 10.2 cm

Fan-forced Heating


Quick response, high output heat—ideal for maintaining comfort in areas subject to cold drafts such as vestibules and stairwells, and automatic fan delay circulates residual heat even after unit cycles off

Flexible Installation

All models offer recessed or surface installation, ceiling or wall mounting

Practical Built-Ins

Includes built-in double pole thermostat, and convenient and subtle access door can be locked for tamperproof applications

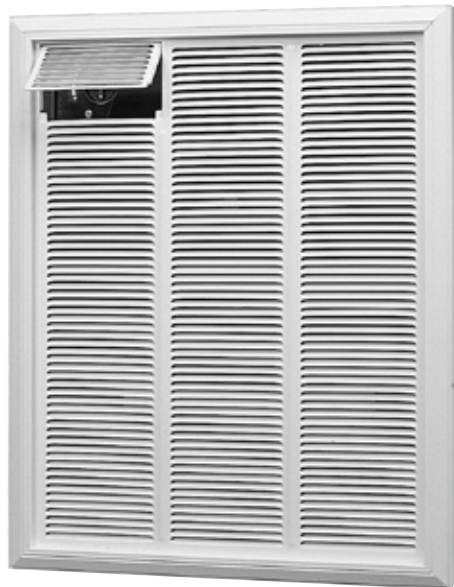

Complete Units (include white grille and built-in thermostat)

Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
RFI815D31W	1500 / 1125	240 / 208	6.3 / 5.4	5118 / 3840	28 / 12.7
RFI820D31W	2000 / 1500	240 / 208	8.3 / 7.2	6824 / 5118	28 / 12.7
RFI830D31W	3000 / 2250	240 / 208	12.5 / 10.8	10236 / 7680	28 / 12.7
RFI840D21W	4000	208	19.2	13648	28 / 12.7
RFI840D31W	4000 / 3000	240 / 208	16.7 / 14.4	13648 / 10236	28 / 12.7
RFI848D31W	4800 / 3600	240 / 208	20 / 17.3	16378 / 12283	28 / 12.7

Accessories (sold separately)

Model	Description
RFI8DW	Surface mount box
RFITF	T-bar ceiling mount trim
RFIFPW	Front panel kit

Product Dimensions (WxHxD)
16-3/4" x 21-1/2" x 5-1/4"
42.5 cm x 54.6 cm x 13.3 cm

Baseboards



Electric baseboards are an innovation that has continued to thrive in the heating industry over decades. This traditional and efficient heating solution is here to stay, and we have a multitude of varieties from which to choose. Replace existing baseboard heaters with improved baseboard technology that you can rely on to keep your loved ones warm in the cold months. Installed out of sight, tucked away neatly on the floor and against the wall, you will almost forget your heater is there with the quiet operating features. See how the products that you have depended on for years are advancing and growing alongside you and your family.

F Series Electric Baseboard

Easy Installation


Pre-punched markings at 1-inch intervals make for simple installation, place under windows for best results

Perfect Replacement

Practical design is built to last and ideal for replacement and retrofit applications, with universal wiring available at both ends

Quiet Operation

Perfect for bedrooms and quiet areas, with no moving parts for a relaxing atmosphere

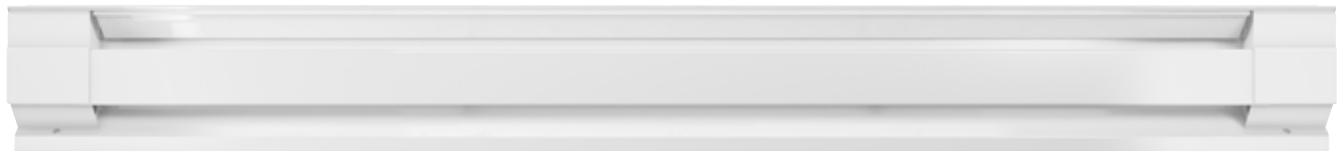

Model*	Watts	Volts	Amps	BTU	Length (in/cm)	Weight (lbs./kg)
2F500-1	500	120	4.2	1710	30 / 76.2	6 / 2.7
3F750-1	750	120	6.3	2560	36 / 91.4	7 / 3.2
4F1000-1	1000	120	8.3	3415	48 / 21.8	9 / 4.1
6F1500-1	1500	120	12.5	5120	72 / 182.9	12 / 5.4
2F500-8	500	208	2.4	1710	30 / 76.2	6 / 2.7
3F750-8	750	208	3.6	2560	36 / 91.4	7 / 3.2
4F1000-8	1000	208	4.8	3415	48 / 21.8	9 / 4.1
5F1250-8	1250	208	6.0	4265	60 / 152.4	10 / 4.5
6F1500-8	1500	208	7.2	5120	72 / 182.9	12 / 5.4
8F2000-8	2000	208	9.6	6825	96 / 243.8	16 / 7.3
8F2500-8	2500	208	12.0	8530	96 / 243.8	18 / 8.2
2F350	350 / 262	240 / 208	1.5 / 1.3	1195 / 895	24 / 61.0	5 / 2.3
2F500	500 / 375	240 / 208	2.1 / 1.8	1710 / 1280	30 / 76.2	6 / 2.7
3F750	750 / 563	240 / 208	3.1 / 2.7	2560 / 1925	36 / 91.4	7 / 3.2
4F1000	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	48 / 21.8	9 / 4.1
5F1250	1250 / 937	240 / 208	5.2 / 4.5	4265 / 3200	60 / 152.4	10 / 4.5
6F1500	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	72 / 182.9	12 / 5.4
8F2000	2000 / 1500	240 / 208	8.3 / 7.2	6825 / 5120	96 / 243.8	16 / 7.3
8F2025	2500 / 2000 1975 / 1500	240 208	10.4 / 8.3 9.0 / 7.2	8530 / 6825 6400 / 5120	96 / 243.8	18 / 8.2
8F2500	2500 / 1875	240 / 208	10.4 / 9.0	8530 / 6400	96 / 243.8	18 / 8.2

Accessories (sold separately)

Model*	Description
BTF2	Double pole built-in thermostat kit (retail pack)
BTF1	Single pole built-in thermostat kit (retail pack)
BTF2	Double pole built-in thermostat kit
BTF1	Single pole built-in thermostat kit
LTF240	Built-in load transfer switch kit
BRF12	Built-in receptacle plate, requires separate supply wire
BTF2TP	Double pole tamperproof built-in thermostat kit
BTF1TP	Single pole tamperproof built-in thermostat kit
BLF1	Corner Connector, inside 90°

*Add suffix W or A to model to designate color

Height x Depth
6-3/4" x 2-1/2"
17.2 cm x 6.4 cm

Portable Baseboard

Thermostat

Easily adjustable for perfect warmth with a large, dial thermostat that includes an off setting

Portable

6-foot cord with grounded plug and built-in carrying handles on each end so you can take comfort with you from room to room

Safe

Built-in safety tip-over switch automatically cuts power to the unit for added peace of mind



Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
4P1500W	1500	120	12.5	5120	8.5 / 4.3

Product Dimensions (WxHxD)

49" x 7-1/2" x 5-3/8"
124.5 cm x 19.0 cm x 13.7 cm



Smart Design

Innovative technology with environmentally-friendly mineral oil that retains heat much longer than standard electric baseboards

Family Friendly

Lowest surface temperatures available to help reduce the effects of indoor allergens in your home—perfect for homes with kids and pets

Silent Operation

Virtually silent operation for a calm, relaxing atmosphere with no plumbing required



Model	Watts	Volts	Amps	BTU	Length (in/cm)	Weight (lbs./kg)
EBHN500-1W	500	120	4.2	1710	35 / 88.9	14.9 / 6.8
EBHN750-1W	750	120	6.3	2560	47 / 119.4	18.9 / 8.6
EBHN1000-1W	1000	120	8.3	3415	59 / 149.9	22.9 / 10.4
EBHN1250-1W	1250	120	10.4	4265	71 / 180.3	26.9 / 12.2
EBHN1500-1W	1500	120	12.5	5120	83 / 210.8	30.9 / 14
EBHN500-8W	500	208	2.4	1710	35 / 88.9	13.9 / 6.3
EBHN750-8W	750	208	3.6	2560	47 / 119.4	17.9 / 8.1
EBHN1000-8W	1000	208	4.8	3415	59 / 149.9	21.9 / 9.9
EBHN1250-8W	1250	208	6.0	4265	71 / 180.3	25.9 / 11.7
EBHN1500-8W	1500	208	7.2	5120	83 / 210.8	29.9 / 13.6
EBHN500W	500 / 375	240 / 208	2.1 / 1.8	1710 / 1280	35 / 88.9	13.9 / 6.3
EBHN750W	750 / 563	240 / 208	3.1 / 2.7	2560 / 1925	47 / 119.4	17.9 / 8.1
EBHN1000W	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	59 / 149.9	21.9 / 9.9
EBHN1250W	1250 / 937	240 / 208	5.2 / 4.5	4265 / 3200	71 / 180.3	25.9 / 11.7
EBHN1500W	1500 / 1125	240 / 208	6.3 / 5.4	5120 / 3840	83 / 210.8	29.9 / 13.6

Accessories (sold separately)



Thermostat Kit

EBKNW

Height x Depth
9-1/2" x 3-1/4"
24.1 cm x 8.3 cm

SoftHeat® Portable

Hydronic Baseboards

Portable Comfort

With a 6-foot cord, move gentle, steady warmth to any room you choose and simply plug it in

Safe & Clean

Perfect for homes with kids and pets, reduce the effect of indoor allergens with the low surface temperature

Enhanced Livability

Sleep sound with nearly silent operation, while the environmentally-friendly mineral oil retains warmth longer and spreads residual heat even after the thermostat kicks off



Model	Watts	Volts	Amps	BTU	Weight (lbs./kg)
EPN1500W	1500	120	12.5	5120	23.3 / 10.5

Product Dimensions (WxHxD)

59" x 9-1/2" x 6-1/2"
149.9 cm x 24.1 cm x 16.5 cm



Linear Convactor Baseboards

Baseboards

Compact Size

Up to 42% smaller in length than conventional baseboards

Construction

Shark-fin heating element blade design improves heat transfer, provides quiet operation and extends product life with a 10-year element warranty

Flexibility

Discreet styling, reduced length and added versatility of placement provide more options when designing a room



Model	Watts	Volts	Amps	BTU	Length (in/cm)	Weight (lbs./kg)
LC2005W31	500 / 375	240 / 208	2.1 / 1.8	1706 / 1280	20 / 50.8	3.75 / 1.7
LC2507W31	750 / 563	240 / 208	3.1 / 2.7	2559 / 1919	25 / 63.5	4.4 / 2.0
LC3010W31	1000 / 750	240 / 208	4.2 / 3.6	3412 / 2559	30 / 76.2	5 / 2.3
LC3512W31	1250 / 938	240 / 208	5.2 / 4.5	4265 / 3199	35 / 88.9	6.65 / 3.0
LC4015W31	1500 / 1125	240 / 208	6.3 / 5.4	5118 / 3839	40 / 101.6	7.5 / 3.2
LC5020W31	2000 / 1500	240 / 208	8.3 / 7.2	6824 / 5120	50 / 127.0	8.2 / 3.7
LC6025W31	2500 / 1875	240 / 208	10.4 / 9.0	8530 / 6398	60 / 152.4	9.7 / 4.4

Accessories (sold separately)



Thermostat Kit

DTK-SP (Single Pole)
DTK-DP (Double Pole)

Height x Depth
6-5/8" x 2-3/8"
16.9 cm x 5.9 cm

Proportional Convector Baseboards

Baseboards

Compact Size Plus

Element design improves heat transfer, provides consistent room temperature and quiet operation, all at a 42% smaller length than conventional baseboards

Have Your Space and Heat It too

Reduced length gives you more options when designing a room, and up to 40% faster heat discharge

Thermostat

Built-in electronic thermostat uses up to 33% less energy than conventional baseboards and thermostats, and all models have a 10-year element warranty



Model	Watts	Volts	Amps	BTU	Length (in/cm)	Weight (lbs./kg)
PC2005W31	500 / 375	240 / 208	2.1 / 1.8	1706 / 1280	20 / 50.8	4 / 1.8
PC2507W31	750 / 563	240 / 208	3.1 / 2.7	2559 / 1919	25 / 63.5	4.65 / 2.1
PC3010W31	1000 / 750	240 / 208	4.2 / 3.6	3412 / 2559	30 / 76.2	5.25 / 2.4
PC3512W31	1250 / 938	240 / 208	5.2 / 4.5	4265 / 3199	35 / 88.9	6.65 / 3
PC4015W31	1500 / 1125	240 / 208	6.3 / 5.4	5118 / 3839	40 / 101.6	7.75 / 3.5
PC5020W31	2000 / 1500	240 / 208	8.3 / 7.2	6824 / 5120	50 / 127.0	8.45 / 3.8
PC6025W31	2500 / 1875	240 / 208	10.4 / 9.0	8530 / 6398	60 / 152.4	9.95 / 4.5



Electronic Thermostat (built-in)

Height x Depth
6-5/8" x 2-3/8"
16.9 cm x 5.9 cm

Panel Convectors



Warm up quickly and quietly with an electric panel convector, as it circulates hot air through the whole room. Convection heating relies on the cycle of cool air being heated inside the panel, rising, and pushing cooler air down to be heated. Choose from a series of sleek designs and innovative functions to opt into an alternative to radiators. It is easy to warm up to the idea of supplemental heat with the safe and easy-to-use Panel Convector.

Allegro II Series

Panel Convectors

Exclusive X Element

The exclusive X-shaped convection heating element paired with a low-thermal fan-forced heater maximizes efficiency

Choose Your Profile

Available in three profiles - low, standard and high - for more installation location flexibility

Programmable Settings

Choose between four settings to heat your room: Comfort; Economy; Frost protection (45°F (7°C)); and Program



Allegro II 14

Model	Watts	Volts	BTU	Width (in/cm)	Weight (lbs./kg)
7315-C05-FS	500 / 375	240 / 208	1706 / 1279	19-1/4 / 48.9	9.6 / 4.4
7315-C10-FS	1000 / 750	240 / 208	3412 / 2559	25-1/2 / 64.9	11.9 / 5.4
7315-C15-FS	1500 / 1125	240 / 208	5118 / 3838	33-3/8 / 84.9	15 / 6.8
7315-C20-FS	2000 / 1500	240 / 208	6824 / 5118	44-1/2 / 112.9	18.8 / 8.5

Height x Depth
14-1/8" x 4"
36.0 cm x 10.0 cm



Allegro II 18

Model	Watts	Volts	BTU	Width (in/cm)	Weight (lbs./kg)
7316-C05-FS	500 / 375	240 / 208	1706 / 1279	16-1/8 / 40.9	10.6 / 4.8
7316-C10-FS	1000 / 750	240 / 208	3412 / 2559	19-1/4 / 48.9	11.2 / 5.1
7316-C15-FS	1500 / 1125	240 / 208	5118 / 3838	25-1/2 / 64.9	13.7 / 6.2
7316-C20-FS	2000 / 1500	240 / 208	6824 / 5118	33-3/8 / 84.9	16.8 / 7.6

Height x Depth
18-1/2" x 4-3/8"
47.0 cm x 11.0 cm



Allegro II 26

Model	Watts	Volts	BTU	Width (in/cm)	Weight (lbs./kg)
7317-C05-FS	500 / 375	240 / 208	1706 / 1279	13 / 32.9	12.4 / 5.6
7317-C10-FS	1000 / 750	240 / 208	3412 / 2559	16-1/8 / 40.9	14.2 / 6.4
7317-C15-FS	1500 / 1125	240 / 208	5118 / 3838	22-3/8 / 56.9	17.6 / 8
7317-C20-FS	2000 / 1500	240 / 208	6824 / 5118	30-1/4 / 76.9	22.9 / 10.4

Height x Depth
26-3/4" x 4-3/4"
68.0 cm x 12.0 cm

Efficient Heating

Designed to create a comfortable space, the air circulates gently and continuously in perfect silence while warming the room

Slim Design

The heater only takes up a small amount of space in your home without compromising on comfort

Thermostat

Built-in electronic thermostat means no need to install a wall thermostat when adding supplemental heat to a room with a central system



Hardwire

Model	Color	Watts	Volts	BTU	Width (in/cm)	Weight (lbs./kg)
7360-C05-BB	White	500 / 375	240 / 208	1706 / 1279	13-1/4 / 34	6.9 / 3.1
7360-C07-BB 7360-C07-HS	White Charcoal	750 / 565	240 / 208	2559 / 1927	13-1/4 / 34	7.2 / 3.3
7360-C10-BB 7360-C10-HS	White Charcoal	1000 / 750	240 / 208	3412 / 2559	16-1/2 / 42	8.1 / 3.7
7360-C12-BB	White	1250 / 940	240 / 208	4265 / 3207	19-5/8 / 50	9.1 / 4.1
7360-C15-BB 7360-C15-HS	White Charcoal	1500 / 1125	240 / 208	5118 / 3838	22-7/8 / 58	10.7 / 4.8
7360-C17-BB	White	1750 / 1315	240 / 208	5971 / 4486	26 / 66	11.7 / 5.3
7360-C20-BB 7360-C20-HS	White Charcoal	2000 / 1500	240 / 208	6824 / 5118	29-1/8 / 74	13.1 / 5.9
7360-C28-BB	White	2000	208	6824	29-1/8 / 74	13.1 / 5.9

Height x Depth
17-1/4" x 3-7/8"
44.5 cm x 10 cm

Plug-in

Model	Color	Watts	Volts	BTU	Length (in/cm)	Weight (lbs./kg)
7358-B05-FS	White	500	120	1706	13-3/8 / 34	7.5 / 3.4
7358-B12-FS	White	1250	120	4265	26 / 66	13 / 5.9

Height x Depth
17-3/4" x 4"
45 cm x 10.2 cm

Specialty



Browse through a variety of specialty heaters for spaces less commonly thought of, but just as well used. Whether you are keeping equipment from freezing overnight or looking for some warmth on your toes in the morning, our selection of specialty heaters has you covered. We have frost protection/pumphouse, ceiling mounted, under cabinet, garage and workshop heaters—for those hard-to-fit places that need heat too. There is no thinking twice about keeping warm this season with our wide selection of specialty heaters.

Under Cabinet Heater

Specialty

Powerful Heat

Greater range of flexible installation with multi-volt and watt capabilities

Discreet

Provides the heat you need with its finned tubular element and fits safely in your cabinet toe kick area

Versatile

Ideal as both a primary heat source for smaller rooms, or as a complementary heating source in large, open living areas



Model	Description	Watts	Volts	Amps	BTU	Weight (lbs./kg)
UCH183 (Cadet)	Complete unit, no thermostat	450 / 900 / 1350 / 1800	120	3.8 / 7.5 / 11.3 / 15	1535 / 3075 / 4610 / 6145	12.3 / 5.6
		900 / 1800	240	3.8 / 7.5	3075 / 6145	
		675 / 1350	208	3.2 / 6.5	4610 / 6145	
DUCH183 (Dimplex)	Complete unit, no thermostat	450 / 900 / 1350 / 1800	120	3.8 / 7.5 / 11.3 / 15	1535 / 3075 / 4610 / 6145	12.3 / 5.6
		900 / 1800	240	3.8 / 7.5	3075 / 6145	
		675 / 1350	208	3.2 / 6.5	4610 / 6145	



Product Dimensions (WxHxD)
21-1/4" x 3-3/4" x 11"
54 cm x 9.5 cm x 28.0 cm

Includes two grilles, black and white

Accessories (sold separately)



UCHT (Cadet)
DUCHT (Dimplex)
Thermostat Kit

Pump House Heater

Specialty

Frost Protection

Ideal solution for moist or cold environments where equipment needs to stay above freezing with corrosion resistant construction and a tubular, stainless steel element

Safe

Built-in safety shutoff makes it perfect for low-clearance locations like crawlspaces

Thermostat

Built-in adjustable thermostat with freeze protection setting and additional no heat setting



Model	Description	Watts	Volts	Amps	BTU	Weight (lbs./kg)
FP051TB	Frost Protection / Pump House / Crawl Space Heater	500	120	4.2	1710	8 / 3.6
FP052TB	Frost Protection / Pump House / Crawl Space Heater	500 / 375	240 / 208	2.1 / 1.8	1710 / 1280	8 / 3.6
FP102TB	Frost Protection / Pump House / Crawl Space Heater	1000 / 750	240 / 208	4.2 / 3.6	3415 / 2560	9.5 / 4.3

Product Dimensions (WxHxD)
 28-1/2" x 4" x 6-1/2"
 71.4 cm x 10.2 cm x 16.5 cm

Radiant Cove Heater

Specialty

Radiant Heating

Comfortably heats people and objects first, then gradually heats your room with natural warmth just like the sun

Space-saving

Installs above doors or windows to save wall space and floor space for optimal room layout options

Quiet Operation

Heating element construction prevents noise when operating



Model	Watts	Volts	Amps	BTU	Length (in/cm)	Weight (lbs./kg)
CORC0602W	600	120	5.0	2050	47 / 119.4	3.75 / 1.7
CORC0752W	750	120	6.3	2560	59 / 149.9	10 / 4.5
CORC0902W	900	120	7.5	3075	71 / 180.3	12 / 5.4
CORC1052W	1050	120	8.8	3585	83 / 210.8	13 / 5.9
CORC1202W	1200	120	10.0	4095	94 / 238.8	15 / 6.8
CORC1502W	1500	120	12.5	5120	113 / 287	18 / 8.2
CORC0608W	600	208	2.9	2050	47 / 119.4	3.75 / 1.7
CORC0758W	750	208	3.6	2560	59 / 149.9	10 / 4.5
CORC0908W	900	208	4.3	3075	71 / 180.3	12 / 5.4
CORC1058W	1050	208	5.0	3585	83 / 210.8	13 / 5.9
CORC1208W	1200	208	5.8	4095	94 / 238.8	15 / 6.8
CORC1508W	1500	208	7.2	5120	113 / 287	18 / 8.2
CORC0600W	600	240	2.5	2050	47 / 119.4	3.75 / 1.7
CORC0750W	750	240	3.1	2560	59 / 149.9	10 / 4.5
CORC0900W	900	240	3.8	3075	71 / 180.3	12 / 5.4
CORC1050W	1050	240	4.4	3585	83 / 210.8	13 / 5.9
CORC1200W	1200	240	5.0	4095	94 / 238.8	15 / 6.8
CORC1500W	1500	240	6.3	5120	113 / 287	18 / 8.2

Accessories (sold separately)

Model	Description
KIT-CORC-TB6	Single pole built-in thermostat kit
KIT-CORC-TB26	Double pole-built in thermostat kit
KIT-CORC-JT	Splice plate, end-to-end installation

Height x Depth
4-1/4" x 3-1/8"
10.8 cm x 7.9 cm

Ceiling-mounted Heaters

Specialty

Ease of Installation

Ceiling installation reduces potential for damage

Economical

Efficiently circulates air and directs heat downward

Thermostat

Built-in thermostat included and for optional wireless control, model RCH5031CXW includes remote wall controller



RCH5031CXW



RCH5031W

Model	Watts	Volts	CFM	Weight (lbs./kg)
RCH5031CXW	5000	240	150	20 / 9.1
RCH5031W	5000	240	150	18.2 / 8.25

Product Dimensions (WxHxD)
 16" x 5-1/4" x 16"
 40.6 cm x 13.3 cm x 40.6 cm



Single-zone
Controller

DPCRWS

Included with RCH5031CXW

Industrial Unit Heater

Specialty

Supplemental Heating

Ideal for retrofit or new construction, the EUH series are perfect for hard-to-heat areas such as warehouses, storage facilities, garages, and shipping and receiving zones

Direct Wire

Requires direct wiring for an ideal and seamless installation, ceiling hanger bracket is included

Thermostat

Built-in adjustable thermostat on all models, many also include a built-in contactor



Product Dimensions (WxHxD)
13" x 19-1/2" x 13-3/8"
33 cm x 49.5 cm x 34 cm

Note: T = Built-in thermostat
CT = Built-in thermostat and contactor

Model	Watts	Volts	BTU	Phase	Weight (lbs./kg)
EUH03B11T	3000	120	10236	1	36 / 16
EUH03B24CT	3000	208	10236	1/3	36 / 16
EUH03B31T	3000 / 2300	240 / 208	10236 / 7677	1	36 / 16
EUH03B34CT	3000 / 2300	240 / 208	10236 / 7677	1/3	36 / 16
EUH03B73CT	3000	480	10236	3	40 / 18
EUH03B81CT	3000	600	10236	1	40 / 18
EUH04B31T	4000	240	13648	1	36 / 16
EUH05B24CT	5000	208	17060	1/3	36 / 16
EUH05B31T	5000 / 3800	240 / 208	17060 / 12795	1	36 / 16
EUH05B34CT	5000 / 3800	240 / 208	17060 / 12795	1/3	36 / 16
EUH05B74CT	5000	480	17060	1/3	40 / 18
EUH05B84CT	5000	600	17060	1/3	40 / 18
EUH08B24CT	7500	208	25590	1/3	46 / 21
EUH08B34CT	7500 / 5600	240 / 208	25590 / 19193	1/3	46 / 21
EUH08B74CT	7500	480	25590	1/3	50 / 22
EUH08B84CT	7500	600	25590	1/3	50 / 22
EUH10B24CT	10000	208	34120	1/3	46 / 21
EUH10B34CT	10000 / 7500	240 / 208	34120 / 25590	1/3	46 / 21
EUH10B74CT	10000	480	34120	1/3	50 / 22
EUH10B84CT	10000	600	34120	1/3	50 / 22

Accessories (sold separately)

Model	Description
EUHWB	Wall hanger bracket

Garage/Workshop Heater

Specialty

Powerful Heating

Powerful fan and 4000 watt stainless steel heater element, accurately balanced and correctly pitched to optimize performance

Versatile Mounting

Versatile mounting bracket attaches to wall or ceiling – heater swivels to direct heat

Temperature Control

Automatic temperature control with built-in double pole thermostat helps maintain consistent temperature from 7 - 25°C (45 - 77°F)



Model	Watts	Volts	BTU	CFM	Weight (lbs./kg)
DGWH4031G (Dimplex)	4000	240	13648	300	10 / 4.5
CGWH4031G (Cadet)	4000	240	13648	300	10 / 4.5



Product Dimensions (WxHxD)
9" x 11" x 7-1/2"
22.9 cm x 27.9 cm x 19.1 cm

CUH

With powerful heat output of 5000 watts at 240V, adjustable louvers to direct warm air where needed and a bulb-type thermostat for accurate temperature control, the hard wire Compact Unit Heater offers great value for industrial applications.

DCH & EMC

The DCH and EMC models have the same 300 CFM output with 4800 watts of heat, packaged as a plug-in model that includes a 6-foot cord, built-in thermostat, carrying handle and stainless steel element. The EMC additionally offers a sealed, permanently lubricated motor and a pull out footstand for directing airflow.



CUH05B31TG



DCH4831LG



EMC4240G

Model	Description	Watts	Volts	BTU	CFM	Product Dimensions (WxHxD)	Weight (lbs./kg)
CUH05B31TG	Compact Unit Heater	5000 / 3750	240 / 208	17060 / 12795	300	9" x 11" x 9" 22.9 cm x 27.9 cm x 22.9	10 / 4.5
DCH4831LG	Portable Construction Heater	4800	240	16377	300	9" x 11" x 7-1/2" 22.9 cm x 27.9 cm x 19.1 cm	10.9 / 4.95
EMC4240G	Enclosed Motor Construction Heater	4800	240	16377	300	9" x 11" x 7-1/2" 22.9 cm x 27.9 cm x 19.1 cm	10.9 / 4.95

Electronic Thermostats

Thermostats



TEP302DW
TEP362DW



TEP402DW



TEN252DW
TEN362DW



TH115-A-240D-B



TH114-A-240D-B



TH401

Model	Description - Electronic Wall Thermostats	Temperature Range (°F / °C)	Watts	Volts	Amps
TEP302DW	Programmable double pole electronic thermostat	41-86 / 5-30	1500 / 2600 / 3000	120 / 208 / 240	12.5
TEP362DW	Programmable double pole electronic thermostat	41-86 / 5-30	1800 / 3120 / 3600	120 / 208 / 240	15
TEP402DW	Programmable double pole electronic thermostat	41-86 / 5-30	2000 / 3467 / 4000	120 / 208 / 240	16.7
TEN252DW	Non-programmable double pole electronic thermostat	41-86 / 5-30	1250 / 2163 / 2500	120 / 208 / 240	10.4
TEN362DW	Non-programmable double pole electronic thermostat	41-86 / 5-30	1800 / 3120 / 3600	120 / 208 / 240	15
TH115-A-240D-B	Programmable double pole electronic thermostat	40-85 / 5-30	3600	208 / 240	15
TH114-A-240D-B	Non-programmable double pole electronic controller	40-85 / 5-30	3600	208 / 240	15
TH401	Non-programmable single-pole electronic thermostat	40-85 / 5-30	1250 / 2163 / 2500	120 / 208 / 240	10.4

Mechanical Thermostats

Thermostats



TS321W
TD322W



T521-W
T522-W



T521-A
T522-A

Dimplex Thermostats

Model	Description	Temperature Range (°F / °C)	Rating (Non-inductive / Inductive)
TS321W	Single pole mechanical thermostat	50-90 / 10-35	5000 W / 277 V Max / 1/3HP / 240V
TD322W	Double pole mechanical thermostat	50-90 / 10-35	5000 W / 277 V Max / 1/3HP / 240V

Cadet Thermostats

Model	Description - Mechanical Wall Thermostats	Temperature Range (°F / °C)	Watts	Volts	Amps
T521-W	Single pole mechanical thermostat, white (retail pack)	50-90 / 10-35	2640 / 4576 / 5280	120 / 208 / 240	22
T522-W	Double pole mechanical thermostat, white (retail pack)	50-90 / 10-35	2640 / 4576 / 5280	120 / 208 / 240	22
T521-W	Single pole mechanical thermostat, white	50-90 / 10-35	2640 / 4576 / 5280	120 / 208 / 240	22
T522-W	Double pole mechanical thermostat, white	50-90 / 10-35	2640 / 4576 / 5280	120 / 208 / 240	22
T521-A	Single pole mechanical thermostat, almond	50-90 / 10-35	2640 / 4576 / 5280	120 / 208 / 240	22
T522-A	Double pole mechanical thermostat, almond (retail pack)	50-90 / 10-35	2640 / 4576 / 5280	120 / 208 / 240	22

Outdoor Heat



Radiant and infrared heating is perfect for homeowners, business owners, landlords, designers or builders looking to enhance an outdoor entertaining space with a premium comfort product that is complementary to modern design. There are three ways to install an IR heater from Dimplex: hang it on the wall; hang it from the ceiling; or attach it to a floor stand. All units must be hardwired and are protected from tough natural elements for long-lasting durability. Stay warm during any season with radiant heat.

Effective Radiant Heat

Warms like the sun, heating people and objects with zero glare year round and weatherproof IP55 rating

Elegant Design

Slim profile is perfect for ceiling and wall-mount applications

Long-wave Radiant Technology

No red glow means you can enjoy ambiance, warmth and comfort in low-light settings



Pictured below with standard mounting brackets included




Model	Color	Watts	Volts	Length (in/cm)	Weight (lbs./kg)
DLW1500B12	Black	1500	120	36 / 91.4	11 / 5
DLW1500W12	White	1500	120	36 / 91.4	11 / 5
DLW2400B24	Black	2400	240	53-1/2 / 135.9	17.5 / 7.9
DLW2400W24	White	2400	240	53-1/2 / 135.9	17.5 / 7.9
DLW3200B24	Black	3200	240	70 / 177.8	22 / 10
DLW3200W24	White	3200	240	70 / 177.8	22 / 10

Accessories (sold separately)

Model	Description
DLWAC12SIL	12" extension mounting pole
DLWAC24SIL	24" extension mounting pole
DLWAC36SIL	36" extension mounting pole
DLWAC48SIL	48" extension mounting pole

For ceiling-mount installations only

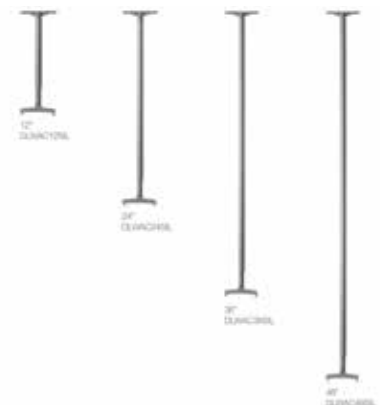

Height x Depth
6-1/2" x 5-5/8"
16.5 cm x 14.2

Schott Nextrema® Ceramic

Schott Nextrema glass ensures even heat distribution and minimizes light emissions

Ease of Operation

Programmable timer with remote control, features safety shutoff after 8 hours of continuous operation

Outdoor Rated

Water/dust tight IP65 rating for outdoor applications



Model	Watts	Volts	Product Dimensions (LxHxD) (in/cm)	Weight (lbs./kg)
DIR15A10GR	1500	120	35-1/2 x 6-3/4 x 3 90.1 x 17.1 x 7.6	13.4 / 6.1
DIR22A10GR	2200	240	35-1/2 x 6-3/4 x 3 90.1 x 17.1 x 7.6	13.4 / 6.1



Model	Watts	Volts	Product Dimensions (LxHxD) (in/cm)	Weight (lbs./kg)
DIR30A10GR	3000	240	50-5/8 x 6-3/4 x 5 128.6 x 17.1 x 12.8	18.4 / 8.4

DIRP Plug-in Outdoor/Indoor Infrared Heater **Outdoor Heat**

Same great features as the DIR series...

Innovative Design

Ensures a safe, easy and space-saving installation

On-screen Display

Shows power setting and timer function at a glance

Now a Plug In Model

7.7 ft. (2.3 m) cord with grounded plug, requires standard 120V outlet



Model	Watts	Volts	Product Dimensions (LxHxD)* (in/cm)	Weight (lbs./kg)
DIRP15A10GR	1500	120	35-1/2 x 10-7/8 x 11-3/4 90.2 x 27.6 x 90.2	7 / 3.2

*Height and depth dimensions include mounting bracket and baffle

DSH Heater

Outdoor Heat

Infrared Heating

Provides premium comfort by reaching maximum heat in less than 3 seconds

Ease of Operation

Programmable timer with remote control, features safety shutoff after 8 hours of continuous operation

Outdoor Rated

Water/dust tight IP65 rating for outdoor applications



Pictured below with standard wall mount bracket included



Accessories (sold separately)



DSHCMB
Ceiling-mount Bracket
Suitable for installation
of 1 or 2 heaters

DSHSTAND
Floor Stand
Suitable for installation
of 1 or 2 heaters

Model	Watts	Volts	BTU	Weight (lbs./kg)
DSH20W	2000	240	1710	11.7 / 5.3

Product Dimensions (WxHxD)
23-1/2" x 6" x 12-7/8"
59.6 cm x 15.4 cm x 32.6 cm

DGR Outdoor Infrared Propane & Gas Heaters Outdoor Heat

Infrared Heat

Heat on demand - where and when you need it with a portable liquid propane model, or a permanently installed natural gas model

Built with Quality

Durable stainless steel construction

Safe Design

Advanced safety features including wind protection



DGR32PLP
Outdoor Portable
Liquid Propane Heater

Product Dimensions (WxHxD)
26-3/4" x 87-1/2" x 27"
68.0 cm 22.2 cm x 69.0 cm

BTU
31,500

Heater stand stores and conceals standard 20-lb liquid propane tank (not included)



DGR32WNG
Outdoor Wall-mounted
Natural Gas Heater

Product Dimensions (WxHxD)
25-1/2" x 16" x 12-1/2"
64.8 cm x 40.6 cm x 31.8 cm

BTU
31,500

Works independently with a plumbed natural gas line

Accessories (sold separately)

Model	Description	Use With
DGRSHIELD	Protective heat shield	DGR32PLP, DGR32WNG
DGRPOLE-WM	Ceiling-mount bracket	DGR32WNG
TGHCOVER	Protective cover	DGR32PLP



DGRSHIELD



DGRPOLE-WM



TGHCOVER

Ordering SKU Index

Apex72		Page 2
Model	SKU	
HWC101K	65402	
HWC102K	65403	
HW051	65316	
HW101	65314	
HW151	65315	
HW052	65305	
HW082	65304	
HW102	65303	
HW132	65302	
HW038	65313	
HW058	65312	
HW078	65311	
HW108	65310	
HW128	65309	
HW168	65308	
HW162	65301	
CC / CC10	67061 / 67060	
CCSMW / CCSMB	69111 / 69110	
ACL / ACL5	67129 / 67131	
ACH / ACH5	67130 / 67132	
OR / OR10	67051 / 67050	

Com-Pak		Pages 3-4
Model	SKU	
CSC101TW	67508	
CSC151TW	67509	
CSC102TW	67505	
CSC152TW	67506	
CSC202TW	67507	
CSC101W	67549	
CSC151W	67553	
CSC072W	67540	
CSC102W	67541	
CSC122W	67542	
CSC152W	67543	
CSC202W	67544	
CS051 / CS051T	67550 / 67560	
CS101 / CS101T	67515 / 67523	
CS151 / CS151T	67516 / 67524	
CS058 / CS058T	67563 / 67573	
CS078 / CS078T	67564 / 67589	
CS108 / CS108T	67557 / 67586	
CS118 / CS118T	67569 / 67598	
CS158 / CS158T	67571 / 67599	
CS208 / CS208T	67517 / 67525	
CS052 / CS052T	67584 / 67585	
CS072 / CS072T	67510 / 67518	
CS102 / CS102T	67511 / 67519	
CS122 / CS122T	67512 / 67520	
CS152 / CS152T	67513 / 67521	
CS202 / CS202T	67514 / 67522	
CTT1W / CTT1A	67063 / 67065	
CTT2W / CTT2A	67064 / 67066	
CTT1P / CTT2P	67067 / 67068	
CTT1W / CTT2W (retail pack)	67071 / 67072	
CC / CC10	67061 / 67060	
CCSMB / CCSMW / CCSMA	69110 / 69111 / 69112	
CGW / CGW10	67079 / 67081	
CGA / CGA10	67075 / 67080	
CGB / CGB10	67082 / 68083	
CMGW CMGW5	65005 / 65006	
CMGA / CMGA5	65015 / 65016	
CAMW / CAMA	67105 / 67100	
SAMW / SAMA	67115 / 67110	
C1TKW	67091	
C4TKW	67094	
KNOB CS/CST WHITE	00535	

Com-Pak Bath		Page 5
Model	SKU	
CBC103TW	65101	
CBC132TW	65105	
CB103T	65103	
CB132T	65104	
CC / CC10	67061 / 67060	
CBGW / CBGW5	65110 / 65140	
C1TKW	67091	
C4TKW	67094	
CAMW / SAMW	67105 / 67115	

Com-Pak Max		Page 6
Model	SKU	
CM158	65037	
CM198 / CM198T	65033 / 65034	
CM152 / CM152T	65035 / 65036	
CM192 / CM192T	65031 / 65032	
CC / CC10	67061 / 67060	
CCSMB / CCSMW / CCSMA	69110 / 69111 / 69112	
CGW / CGW10	67079 / 67081	
CGA / CGA10	67075 / 67080	
CGB / CGB10	67082 / 68083	
CMGW CMGW5	65005 / 65006	
CMGA / CMGA5	65015 / 65016	
CTT1W / CTT1A	67063 / 67065	
CTT2W / CTT2A	67064 / 67066	
CTT1P / CTT2P	67067 / 67068	
CAMW / CAMA	67105 / 67100	
SAMW / SAMA	67115 / 67110	

Ordering Sku Index

Com-Pak Twin		Page 7
Model	SKU	
CSTC302TW	67526	
CSTC402TW	67527	
CSTC302W	67545	
CSTC402W	67546	
CST308 / CST308T	67574 / 67534	
CST408 / CST408T	67530 / 67533	
CST302 / CST302T	67528 / 67531	
CST402 / CST402T	67529 / 67532	
CTGW / CTGA	67089 / 67090	
CTC	68005	
CTAMW / CTAMA	68075 / 68070	
CTS4W / CTS4A	69104 / 69100	
CTT1W / CTT1A	67063 / 67065	
CTT2W / CTT2A	67064 / 67066	
CTT1P / CTT2P	67067 / 67068	

Energy Plus		Page 8
Model	SKU	
CEC163TW	65215	
CE163T	65204	
CC / CC10	67061 / 67060	
CCSMW / CCSMB	69111 / 69110	
CEGW / CEGB	65252 / 65251	
CAMW	67105	
SAMW	67115	

Register		Pages 9
Model	SKU	
RMC151W	63315	
RMC208W	63316	
RMC162W	63314	
RMC202W	63313	
RM151	00308	
RM108	00310	
RM158	00323	
RM168	00313	
RM208	00309	
RM102	00311	
RM162	00307	
RM202	00306	
RM222	00322	
RMGW / RMGA	00275 / 00276	
RMGW5 / RMGA5	63113 / 63114	
RMC / RMC5	63115 / 63116	
RMT2W / RMT2A	63123 / 63124	

RBF		Page 10
Model	SKU	
RBF101	79241	
RBFC	79243	

RFI Series		Page 11
Model	SKU	
RFI815D31W	RFI815D31W	
RFI820D31W	RFI820D31W	
RFI830D31W	RFI830D31W	
RFI840D21W	RFI840D21W	
RFI840D31W	RFI840D31W	
RFI848D31W	RFI848D31W	
RFP8DW	RFP8DW	
RFITF	RFITF	
RFIFPW	RFIFPW	

F Series Baseboard		Page 13
Model	SKU	
2F500-1W / 2F500-1A	05530 / 05520	
3F750-1W / 3F750-1A	05532 / 05522	
4F1000-1W / 4F1000-1A	05534 / 05524	
6F1500-1W / 6F1500-1A	05536 / 05526	
2F500-8W / 2F500-8A	11924-1 / 11918-1	
3F750-8W / 3F750-8A	11934 / 11938-1	
4F1000-8W / 4F1000-8A	11944 / 11948	
5F1250-8W / 5F1250-8A	11954-1 / 11958-1	
6F1500-8W / 6F1500-8A	11964 / 11968	
8F2000-8W / 8F2000-8A	10924 / 11990	
8F2500-8W / 8F2500-8A	03360 / 03358	
2F350W / 2F350A	09949 / 06501	
2F500W / 2F500A	09950 / 06502	
3F750W / 3F750A	09952 / 06508	
4F1000W / 4F1000A	09954 / 06509	
5F1250W / 5F1250A	09955 / 06510	
6F1500W / 6F1500A	09956 / 06511	
8F2000W / 8F2000A	09958 / 06513	
8F2025W / 8F2025A	09960 / 06515	
8F2500W / 8F2500A	03360 / 03358	
BTF2W / BTF2A (retail pack)	08734 / 03365	
BTF1W / BTF1A (retail pack)	08732 / 03366	
BTF2W / BTF2A	14925 / 14920	
BTF1W / BTF1A	14915 / 14910	
LTF240W / LTF240A	14963 / 14960	
BRF12W / BRF12A	14902 / 14900	
BTF1TPW / BTF1TPA	14932 / 14930	
BTF2TPW / BTF2TPA	14942 / 14940	
BLF1W / BLF1A	14971 / 14970	

Portable Baseboard		Page 14
Model	SKU	
4P1500W	05601	

Ordering Sku Index

SoftHeat Page 15

Model	SKU
EBHN500-1W	EBHN500-1W
EBHN750-1W	13412
EBHN1000-1W	13413
EBHN1250-1W	13414
EBHN1500-1W	13415
EBHN500-8W	13462-1
EBHN750-8W	13463-1
EBHN1000-8W	13464
EBHN1250-8W	13465
EBHN1500-8W	13466
EBHN500W	13457-1
EBHN750W	13458-1
EBHN1000W	13459-1
EBHN1250W	13460-1
EBHN1500W	13461-1
EBKNW	13170

SoftHeat Portable Page 16

Model	SKU
EPN1500W	13469-1

Linear Convectector Page 17

Model	SKU
LC2005W31	LC2005W31
LC2507W31	LC2507W31
LC3010W31	LC3010W31
LC3512W31	LC3512W31
LC4015W31	LC4015W31
LC5020W31	LC5020W31
LC6025W31	LC6025W31
DTK-SP	DTK-SP
DTK-DP	DTK-DP

Proportional Convectector Page 18

Model	SKU
PC2005W31	PC2005W31
PC2507W31	PC2507W31
PC3010W31	PC3010W31
PC3512W31	PC3512W31
PC4015W31	PC4015W31
PC5020W31	PC5020W31
PC6025W31	PC6025W31

Allegro II Convection Page 20

Model	SKU
7315-C05-FS	7315-C05-FS
7315-C10-FS	7315-C10-FS
7315-C15-FS	7315-C15-FS
7315-C20-FS	7315-C20-FS
7316-C05-FS	7316-C05-FS
7316-C10-FS	7316-C10-FS
7316-C15-FS	35587-1
7316-C20-FS	35588-1
7317-C05-FS	7317-C05-FS
7317-C10-FS	7317-C10-FS
7317-C15-FS	35591-1
7317-C20-FS	7317-C20-FS

Apero Convection Panel Page 21

Model	SKU
7360-C05-BB	7360-C05-BB
7360-C07-BB	7360-C07-BB
7360-C07-HS	35692-1
7360-C10-BB	7360-C10-BB
7360-C10-HS	35694-1
7360-C12-BB	35695-1
7360-C15-BB	7360-C15-BB
7360-C15-HS	7360-C15-HS
7360-C17-BB	35698-1
7360-C20-BB	7360-C20-BB
7360-C20-HS	7360-C20-HS
7360-C28-BB	7360-C28-BB
7358-B05-FS	7358-B05-FS
7358-B12-FS	7358-B12-FS

Under Cabinet Heater Page 23

Model	SKU
UCH183	10051
UCHT	66051
DUCH183	40051
DUCHT	46051

Pump House Heater Page 24

Model	SKU
FP051TB	30101
FP052TB	30102
FP102TB	30103

Cove Heater Page 25

Model	SKU
CORC0602W	80012-1
CORC0752W	80013
CORC0902W	80014
CORC1052W	80015
CORC1202W	80016
CORC1502W	80017
CORC0608W	80082
CORC0758W	80083
CORC0908W	80084
CORC1058W	80085
CORC1208W	80086
CORC1508W	80087-1
CORC0600W	80022
CORC0750W	80023
CORC0900W	80024
CORC1050W	80025
CORC1200W	80026
CORC1500W	80027
KIT-CORC-TB6	80001
KIT-CORC-TB26	80002-1
KIT-CORC-JT	80003

RCH Series Page 26

Model	SKU
RCH5031CXW	RCH5031CXW
RCH5031W	RCH5031W

Ordering Sku Index

EUH Industrial Heater Page 27

Model	SKU
EUH03B11T	EUH03B11T
EUH03B24CT	EUH03B24CT
EUH03B31T	EUH03B31T
EUH03B34CT	EUH03B34CT
EUH03B73CT	EUH03B73CT
EUH03B81CT	EUH03B81CT
EUH04B31T	EUH04B31T
EUH05B24CT	EUH05B24CT
EUH05B31T	EUH05B31T
EUH05B34CT	EUH05B34CT
EUH05B74CT	EUH05B74CT
EUH05B84CT	EUH05B84CT
EUH08B24CT	EUH08B24CT
EUH08B34CT	EUH08B34CT
EUH08B74CT	EUH08B74CT
EUH08B84CT	EUH08B84CT
EUH10B24CT	EUH10B24CT
EUH10B34CT	EUH10B34CT
EUH10B74CT	52317
EUHWB	EUHWB

Garage/Workshop Heaters Page 28

Model	SKU
DGWH4031G	DGWH4031G
CGWH4031G	CGWH4031G

Construction/Unit Heaters Page 29

Model	SKU
CUH05B31TG	CUH05B31TG
DCH4831LG	DCH4831LG
EMC4240G	EMC4240G

Electronic Thermostats Page 30

Model	SKU
TEP302DW	08203
TEP362DW	08204
TEP402DW	08205
TEN252DW	08201
TEN362DW	08202
TH115-A-240D-B	08165
TH114-A-240D-B	08162
TH401	72838

Mechanical Thermostats Page 31

Model	SKU
TS321W	TS321W
TD322W	TD322W
T521-W (retail pack)	08300
T522-W (retail pack)	08301
T521-W	72865
T522-W	72866
T521-A	72832
T522-A (retail pack)	08401

DLW Radiant Page 33

Model	SKU
DLW1500B12	DLW1500B12
DLW1500W12	DLW1500W12
DLW2400B24	DLW2400B24
DLW2400W24	DLW2400W24
DLW3200B24	DLW3200B24
DLW3200W24	DLW3200W24
DLWAC12SIL	DLWAC12SIL
DLWAC24SIL	DLWAC24SIL
DLWAC36SIL	DLWAC36SIL
DLWAC48SIL	DLWAC48SIL

DIR Infrared Page 34

Model	SKU
DIR15A10GR	DIRP15A10GR
DIR22A10GR	DIR22A10GR
DIR30A10GR	DIR30A10GR

DIRP Plug-In Infrared Page 35

Model	SKU
DIRP15A10GR	DIRP15A10GR

DSH Infrared Page 36

Model	SKU
DSH20W	DSH20W
DSHSTAND	DSHSTAND
DSHCMB	DSHCMB

DGR Outdoor Infrared Page 37

Model	SKU
DGR32PLP	DGR32PLP
DGR32WNG	DGR32WNG
DGRSHIELD	500001727
DGRPOLE-WM	500001511
TGHCOVER	TGHCOVER

